

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 902 184 A2

(12)

# EUROPEAN PATENT APPLICATION

(43) Date of publication:  
17.03.1999 Bulletin 1999/11

(51) Int. Cl.<sup>6</sup>: F04B 39/00

(21) Application number: 98115986.6

(22) Date of filing: 25.08.1998

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(30) Priority: 11.09.1997 IT MI972073

(71) Applicant: Clam S.p.A.  
20050 Ronco Briantino (Milano) (IT)

(72) Inventor: Cavicchioli, Lanfranco  
20059 Vimercate, (Prov. of Milano) (IT)

(74) Representative:  
Modiano, Guido, Dr.-Ing. et al  
Modiano & Associati SpA  
Via Meravigli, 16  
20123 Milano (IT)

(54) **Method for manufacturing an intake muffler, particularly for compression circuits for refrigeration systems and the like**

(57) A method for manufacturing intake mufflers, particularly for compression circuits for refrigeration systems and the like, comprising the steps of: molding a cover (2) and a base (1) of an intake muffler; and mutually assembling the base (1) and the cover (2) in a mold inside which a perimetric profile is formed which is adapted to form a retention joint (3) which is molded perimetrically at the edge where the base (1) and the cover (2) are mutually coupled.

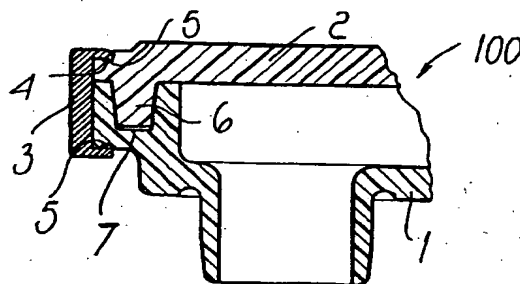


Fig. 3

EP 0 902 184 A2

## Description

**[0001]** The present invention relates to a method for manufacturing an intake muffler, particularly for compression circuits for refrigeration systems and the like.

**[0002]** Conventionally an air intake device, which acts as silencer and as cooling system, is used for each compressor in compression circuits.

**[0003]** This device, better known as intake muffler, consists of two parts: a base, in which a labyrinth-like path is molded, and a cover; said parts are assembled in order to obtain a hermetic casing.

**[0004]** In view of the particular operating conditions, since the intake is transmitted to capillary ducts, the muffler must be provided so that in addition to ensuring perfect tightness it has no flash which, as a consequence of its separation, might start circulating and obstruct said capillary passages.

**[0005]** Intake mufflers are currently manufactured in two parts which are joined by ultrasonic welding. Although this type of welding occurs in controlled conditions as regards the profile of the two parts to be coupled, the shape of the sonotrode and the frequency and intensity of the welding action, nonetheless some of the welded parts have flash along their inside and outside perimeters.

**[0006]** This is due to the fact that producing a perfect seal and the absence of flash are two mutually contrasting requirements, since a lower welding intensity, and therefore the absence of flash, is matched by a poor seal of the joint provided between the two assembled parts.

**[0007]** On the contrary, higher welding intensity and therefore better tightness of the joint is matched by the presence of internal and external perimetric flash.

**[0008]** It should be observed that internal flash is the most damaging, since it cannot be detected once the muffler has been assembled, and is also responsible for any obstructions of the capillary passages if it breaks off.

**[0009]** Optimization of the ultrasonic welding joint has been sought by designing various shapes of the parts to be assembled and by forming on the perimeter of the cover a rim for containing any flash produced.

**[0010]** These solutions, however, are unsatisfactory, both because the flash persists and because the rim for containing said flash breaks during ultrasonic welding.

**[0011]** Another conventional solution for mutually assembling the cover and the base of the muffler provides for the mutual interlocking of the two parts by means of teeth formed in the plastic; in this manner the muffler is not pressure-tight.

**[0012]** Another conventional solution provides for the insertion, between the base and the cover, of a third element made of rubber-like material which, when compressed, provides at least some sort of pressure-tightness.

**[0013]** The aim of the present invention is to provide a

method for manufacturing an intake muffler for compression circuits for refrigeration systems and the like which combines optimum tightness with substantially complete absence of flash.

**[0014]** Within the scope of this aim, an object of the present invention is to provide a method for manufacturing an intake muffler for compression circuits for refrigeration systems and the like in which internal flash is fully eliminated.

**[0015]** Another object of the present invention is to provide a method for manufacturing an intake muffler for compression circuits for refrigeration systems and the like in which the construction method according to the invention is provided by modifying molds that are currently used.

**[0016]** Another object of the present invention is to provide a method for manufacturing an intake muffler for compression circuits for refrigeration systems and the like which is highly reliable, relatively easy to manufacture and at low costs.

**[0017]** This aim, these objects and others which will become apparent hereinafter are achieved by a method for manufacturing an intake muffler, particularly for compression circuits for refrigeration systems and the like, comprising the steps of:

molding a cover and a base of an intake muffler; and

mutually assembling said base and said cover in a mold inside which a perimetric profile is formed, being adapted to form a retention joint which is molded perimetrically at the edge where said base and said cover are mutually coupled.

**[0018]** This aim, these objects and others are also achieved by an intake muffler for compression circuits, particularly for refrigeration systems and the like, comprising a base provided with air passage channels and with a cover which is meant to be coupled to said base, characterized in that it comprises a retention joint which is molded around the perimetric seam between said base and said cover.

**[0019]** Further characteristics and advantages of the invention will become apparent from the following detailed description of a preferred but not exclusive embodiment of the device according to the invention, illustrated only by way of non-limitative example in the accompanying drawings, wherein:

Figure 1 is a plan view of the cover of the intake muffler, produced with the method according to the present invention;

Figure 2 is a plan view of the base of the intake muffler, produced with the method according to the present invention;

Figure 3 is a partial sectional side elevation view of a detail of the connection between the base and the cover of the intake muffler provided by means of the

method according to the present invention;

Figure 4 is a partial sectional side elevation view of the interlocking portion of the cover of the intake muffler produced according to the present invention;

Figure 5 is a partial sectional side elevation view of the interlocking portion of the base of the intake muffler produced according to the invention;

Figure 6 is a view of a detail of the base of the muffler for the hermetic mutual assembly of the base and of the cover of the intake muffler;

Figure 7 is a partial plan view of the intake muffler according to a second embodiment of the present invention.

[0020] With reference to the above figures, the method for manufacturing the intake muffler according to the present invention comprises a first step which consists in molding the base 1 and the cover 2 of the muffler in separate molds, thus obtaining the finished parts meant to be assembled in order to constitute the intake muffler, generally designated by the reference numeral 100 in Figure 3.

[0021] The step for the assembly of the muffler is performed in a suitable assembly mold, in which a perimetric profile is formed, being adapted to provide a retention joint 3 which is molded perimetrically at the coupling edge of the base 1 and of the cover 2.

[0022] The retention joint 3 thus closes the perimeter of the base and of the cover of the muffler; in order to provide a hermetic coupling on the upper surface of the cover 2, at the edge, and on the lower surface of the base, at the rim, perimetric grooves 4 are provided in which complementarily shaped raised portions 5 engage. The raised portions are formed on the retention joint 3 as a consequence of molding in the mold for the assembly of the muffler 100.

[0023] The retention joint therefore has, in a transverse sectional view, a substantially C-shaped profile as shown in Figure 3.

[0024] The coupling between the base 1 and the cover 2 occurs by means of the interlocking of a frustum-shaped protrusion 6 of the cover 2 in a cavity 7 formed in the base 1.

[0025] The frustum-like shape of the cavity 7 and of the protrusion 6 allows to obtain an interlock between the base 1 and the cover 2 which combines with the action of the retention joint 3, engaging between the rim of the cover 2 and the rim of the base 1, as described above.

[0026] The molding of the retention joint 3 around the seam for coupling the base and the cover eliminates the possibility of forming internal flash and any external flash that might form at the closure regions of the mold can be easily eliminated.

[0027] The compactness of the muffler can be increased by using additional systems for mutually anchoring the retention joint 3 and the base 1 of the

muffler.

[0028] In particular, it is possible to provide undercuts 8 formed as grooves provided in the outer rim of the base 1 of the muffler.

[0029] By means of said undercuts 8, the engagement of the retention joint 3 on the rim of the assembled muffler is stronger.

[0030] In practice it has been observed that the method according to the invention fully achieves the intended aim, since it allows to perform the hermetic assembly of an intake muffler while avoiding the forming of internal and external perimetric flash, which can be damaging, if it breaks off, by obstructing capillary passages in which the cooling air aspirated by the compressor through said muffler must pass.

[0031] The method thus conceived is susceptible of numerous modifications and variations, all of which are within the scope of the inventive concept; all the details may furthermore be replaced with other technically equivalent elements. For example, as shown in Figure 7, the base 1 and the cover 2 of the muffler can be provided, at one or more outer rim regions, with an undercut which is more definite than the undercuts 4 (perimetric grooves) shown in Figure 3, to anchor the retention joint 3. The outer rim profile is suitably interrupted at one or more regions, to define at least one indentation 10. Accordingly, the retention joint 3 is molded perimetrically and the indentation 10 fills with molded material when the base and the cover are assembled, in order to strengthen the coupling.

[0032] In practice, the materials employed, so long as they are compatible with the specific use, as well as the dimensions, may be any according to requirements and to the state of the art.

[0033] The disclosures in Italian Patent Application No. MI97A002073 from which this application claims priority are incorporated herein by reference.

[0034] Where technical features mentioned in any claim are followed by reference signs, those reference signs have been included for the sole purpose of increasing the intelligibility of the claims and accordingly, such reference signs do not have any limiting effect on the interpretation of each element identified by way of example by such reference signs.

## Claims

1. A method for manufacturing intake mufflers, particularly for compression circuits for refrigeration systems and the like, comprising the steps of:

molding a cover and a base of an intake muffler; and


mutually assembling said base and said cover in a mold inside which a perimetric profile is formed which is suitable to form a retention joint which is molded perimetrically at the edge where said base and said cover are mutually

coupled.

2. The method according to claim 1, characterized in that respective perimetric grooves are formed at the rim in said base and in said cover and are suitable to engage complementarily shaped raised portions formed during the molding of said retention joint for the mutual hermetic coupling of said base and said cover. 5
3. The method according to claim 1, characterized in that said retention joint formed by molding in the mold for mutually assembling said base and said cover has a profile whose transverse cross-section is substantially C-shaped. 10
4. The method according to claim 1, characterized in that said base has a cavity which is shaped like a truncated cone and is arranged perimetrically. 15
5. The method according to claim 4, characterized in that said cover has a protrusion which is shaped complementarily to said cavity formed in the base, in order to provide a hermetic coupling between said cover and said base. 20
6. A method according to claim 1, characterized in that said base has undercuts at its outer rim for engaging said retention joint. 25
7. An intake muffler for compression circuits, particularly for refrigeration systems and the like, comprising a base provided with air passage channels and a cover meant to be coupled to said base, characterized in that it comprises a retention joint which is molded around the perimetric seam between said base and said cover. 30
8. An intake muffler according to claim 7, characterized in that said retention joint is anchored to the upper surface of said cover and to the lower surface of said base. 35
9. An intake muffler according to claim 7, characterized in that said retention joint has a profile whose transverse cross-section is substantially C-shaped. 40
10. An intake muffler according to claim 8, characterized in that the upper surface of said cover has a perimetric groove arranged at its edge. 45
11. An intake muffler according to claim 8, characterized in that the lower surface of said base has a perimetric groove at its edge. 50
12. An intake muffler according to claim 2, characterized in that said retention joint is molded so that it is anchored to said base and said cover, said reten-

tion joint being engaged in said grooves formed in the base and in the cover.

13. An intake muffler according to claims 10 and 11, characterized in that said base and cover each have an indentation defined in said perimetric groove.

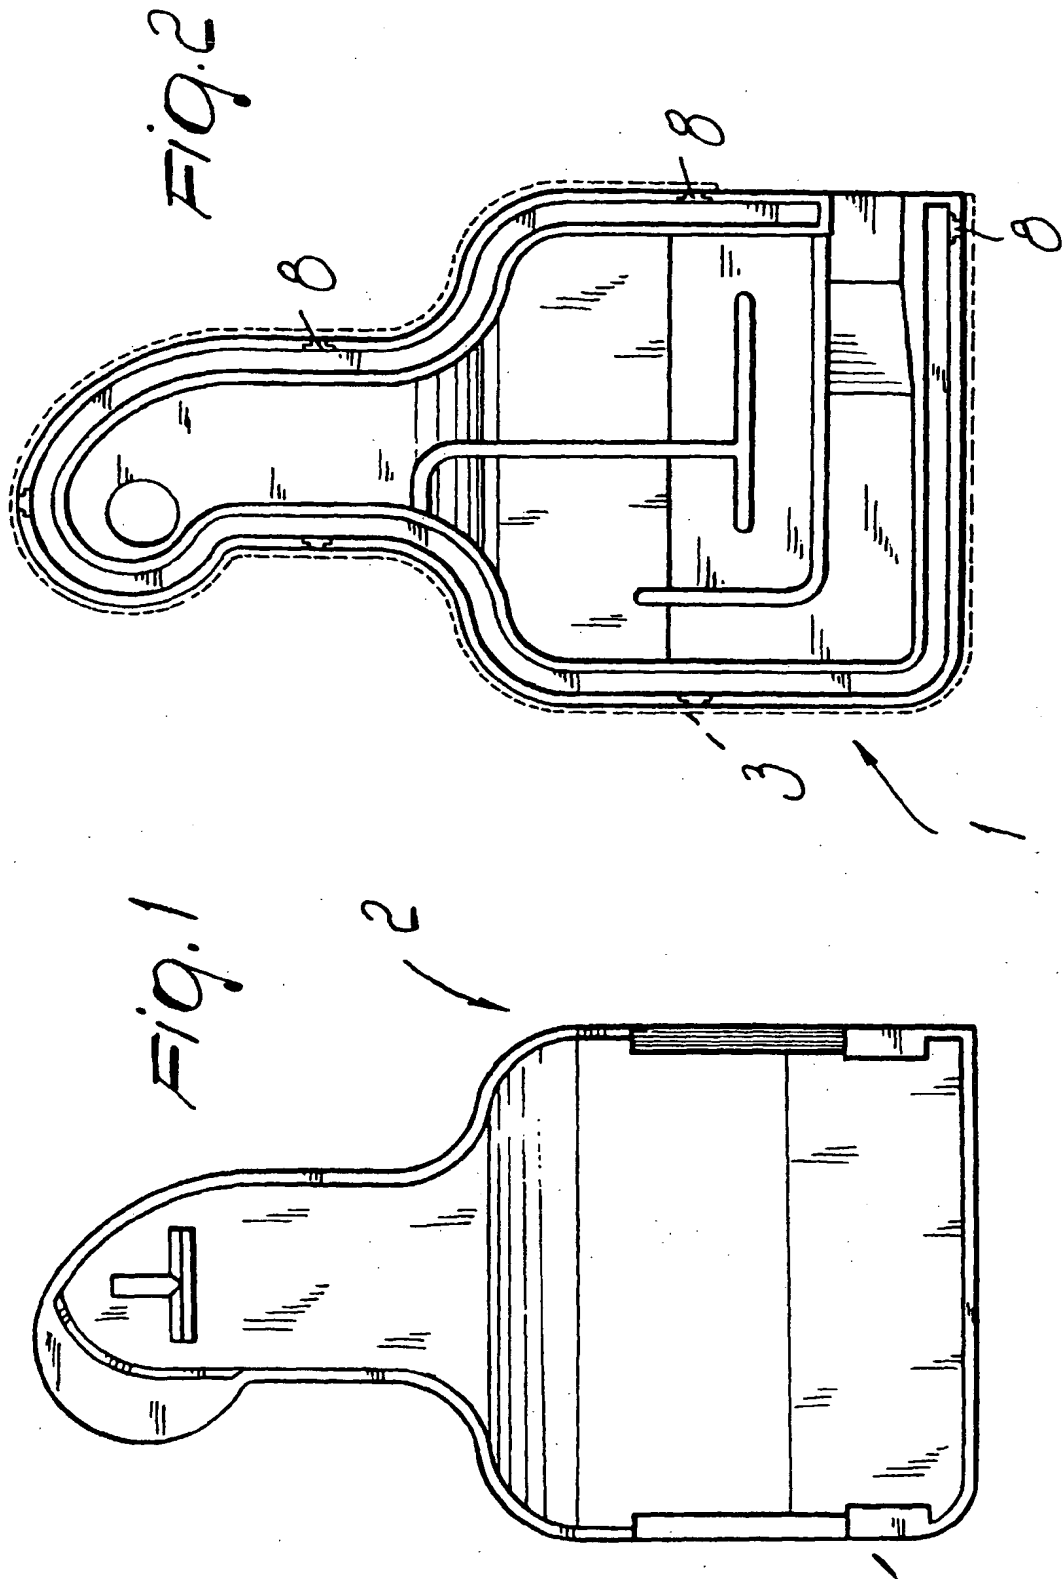

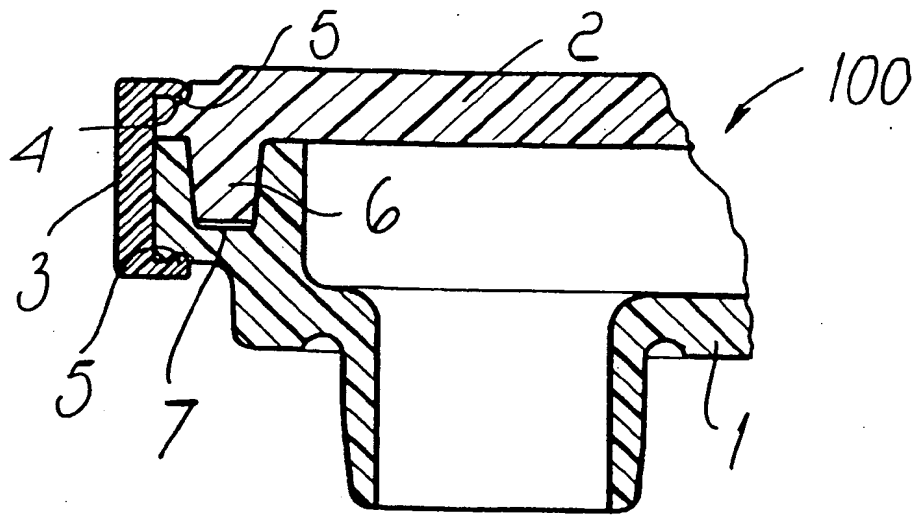


Fig. 3




Fig. 4




Fig. 5

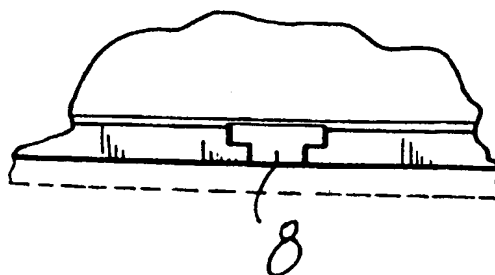


Fig. 6


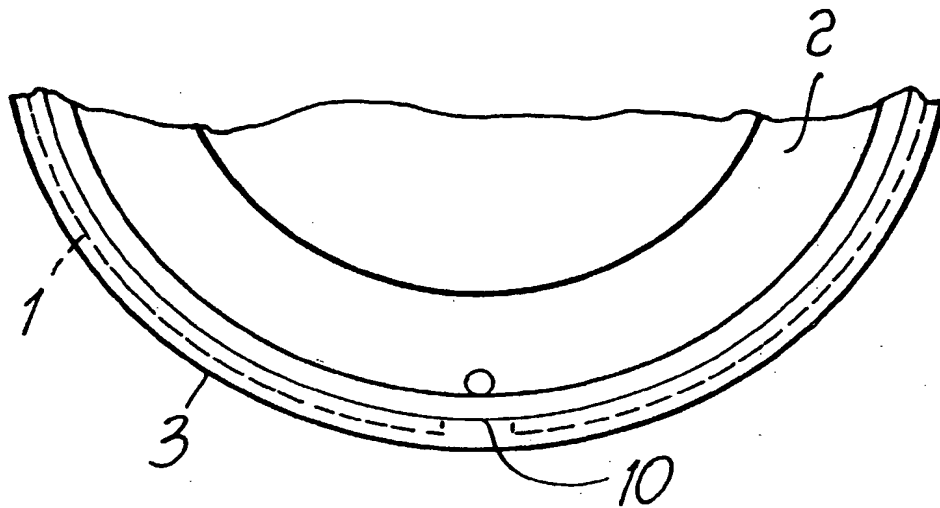


Fig. 7

**THIS PAGE BLANK (USPTO)**





(19)

Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 0 902 184 A3

(12)

## EUROPEAN PATENT APPLICATION

(88) Date of publication A3:  
22.03.2000 Bulletin 2000/12

(51) Int. Cl.<sup>7</sup>: F04B 39/00

(43) Date of publication A2:  
17.03.1999 Bulletin 1999/11

(21) Application number: 98115986.6

(22) Date of filing: 25.08.1998

(84) Designated Contracting States:  
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE  
Designated Extension States:  
AL LT LV MK RO SI

(72) Inventor: Cavicchioli, Lanfranco  
20059 Vimercate, (Prov. of Milano) (IT)

(74) Representative:  
Modiano, Guido, Dr.-Ing. et al  
Modiano & Associati SpA  
Via Meravigli, 16  
20123 Milano (IT)

(30) Priority: 11.09.1997 IT MI972073

(71) Applicant: Clam S.p.A.  
20050 Ronco Briantino (Milano) (IT)

(54) **Method for manufacturing an intake muffler, particularly for compression circuits for refrigeration systems and the like**

(57) A method for manufacturing intake mufflers, particularly for compression circuits for refrigeration systems and the like, comprising the steps of: molding a cover (2) and a base (1) of an intake muffler; and mutually assembling the base (1) and the cover (2) in a mold

inside which a perimetric profile is formed which is adapted to form a retention joint (3) which is molded perimetrically at the edge where the base (1) and the cover (2) are mutually coupled.

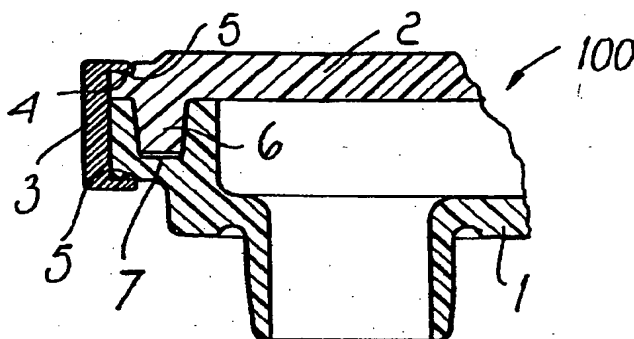


Fig. 3

EP 0 902 184 A3



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 98 11 5986

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.5)
Y	US 4 960 368 A (LILIE DIETMAR E B) 2 October 1990 (1990-10-02) * abstract *	1-3,7-12	F04B39/00 B29C67/00
A	* column 4, line 1 - line 41 * * column 5, line 3 - line 29 * * figures 1,3-5 *	4,5	
Y	FR 2 690 376 A (APLAST CONSORTIUM) 29 October 1993 (1993-10-29) * abstract *	1-3,7-12	
A	* page 4, line 21 - page 9, line 34 * * figures *	4,5	
A	JP 59 043917 A (SANYO DENKI KK;OTHERS: 01) 12 March 1984 (1984-03-12) * figures 2-5 *	1,4,5,7	
A	US 4 544 588 A (SCHAUF DIETER) 1 October 1985 (1985-10-01) * abstract *	1-3,7-12	
	* column 3, line 59 - column 4, line 24 * * figures 1-3 *		
A	US 5 341 654 A (HEWETTE CHIP ET AL) 30 August 1994 (1994-08-30) * abstract *	1,4,5,7	F04B F01N B29C
	* column 3, line 3 - column 4, line 56 * * figures 3-8 *		
A	FR 1 005 684 A (S A DES ROULEMENTS A AIGUILLES) 21 April 1952 (1952-04-21) * page 1, column 1, paragraph 1 - paragraph 2 * * page 4, column 1, paragraph 4 - paragraph 5 * * figures 1-4 *	1,3,6,7,9,13	
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>2 February 2000</b>	Examiner <b>Kolby, L</b>
CATEGORY OF CITED DOCUMENTS		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPO FORM 1503 03 82 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 98 11 5986

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.  
The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

02-02-2000

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 4960368	A	02-10-1990	NONE		
FR 2690376	A	29-10-1993	NONE		
JP 59043917	A	12-03-1984	JP 1681103 C		31-07-1992
			JP 3045212 B		10-07-1991
US 4544588	A	01-10-1985	DE 3312231 A		11-10-1984
			CA 1214013 A		18-11-1986
			EP 0121207 A		10-10-1984
			JP 59198116 A		09-11-1984
US 5341654	A	30-08-1994	CN 1099846 A		08-03-1995
FR 1005684	A	21-04-1952	NONE		

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

THIS PAGE BLANK (USPTO)